

## Disclaimer:

- The HeroTill team **does not assist** with the creation or management of **custom hotspot templates**.
- The creation and management of **custom hotspot templates** is the **WISP's responsibility**.
- We would, however, advise that you have a professional assist you with the creation and/or management of the custom hotspot templates.
- Custom hotspot templates are not mandatory.

## 1. Adding a Custom Hotspot Template

We provide two custom templates that may be used once modified. These templates can be found in the following folder on the physical server:


- **“/var/www/html/datatill/assets/hotspot/templates/”** (These files would have to be moved in and out of this directory via FTP)

### 1.1. To add Custom Hotspot Templates:

To add your custom hotspot templates, you will need to go to **“Hotspots”** - **“Hotspot Setup”** - **“Hotspot Templates”**



On the following screen, click on the “**Add Template**” button.

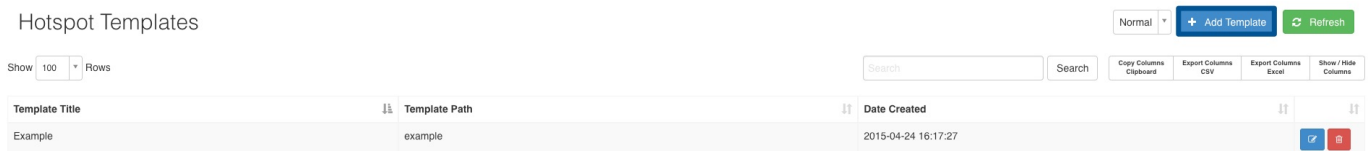

The current templates are named as follow:

- **example**
- **example\_data\_capture**

More custom hotspot templates may be added or renamed as long as they have been stored in the correct directory on the server via FTP.

Add a new Hotspot Template ✕

**Template Title**

**Template Folder**


example\_data\_capture

**example**

Template folders are located in `"/var/www/html/datatill/assets/hotspot/templates/"`

## 1.2. Adding a custom hotspot template to a landing page

To add your custom hotspot template to a landing page, go to **Hotspots** - **Hotspot Templates**.

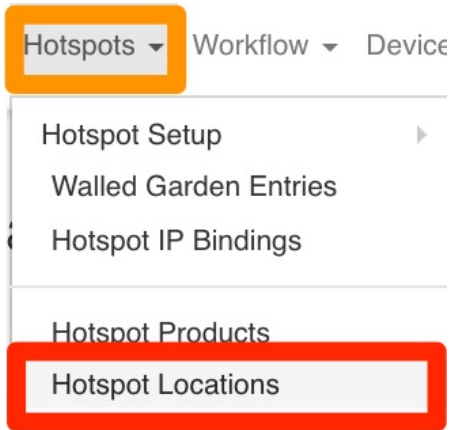

On the hotspot location, you will need to ensure that the following is done:

- Select **“Use Custom Template”**
- Select **“Custom Template from drop-down menu”**.

Add a new Hotspot Location ✕

General Hotspot Settings

**Hotspot ID**  Mikrotik Hotspot Server Name All Spaces "" will be replaced with "\_"

**Hotspot Mode**

**Use Custom Template**

**Custom Template**

**Display Location Name**

**Location Name**  Displayed on the login page

**Short Name**  Used as a label on various graphs

**Hotspot Router**

Mikrotik hotspot router

Cancel

Add Location

If no template appears, this means you have not created the custom template correctly under

- [https://company.com/hotspot/hotspot\\_templates](https://company.com/hotspot/hotspot_templates)
- Please note it has to be [https://Your Company Name.com/hotspot/hotspot\\_templates](https://Your Company Name.com/hotspot/hotspot_templates)

### 1.3. Sample Hotspot Templates:













## Welcome to

Hotspot vouchers are available online using a | Credit Card, Debit Card or instant EFT by clicking on the black voucher below | Or by cash from your closest reseller  
Purchase a Hotspot Voucher


- Daily 50MB
- Daily 100MB
- Daily 200MB
- Monthly 1GB
- Monthly 2GB
- Monthly 3GB
- Monthly 5GB
- Monthly 10GB


Login with a Voucher


  
  
  

Prepaid Services

Prepaid users can register for a new data service or can login to topup an existing data service using the buttons below

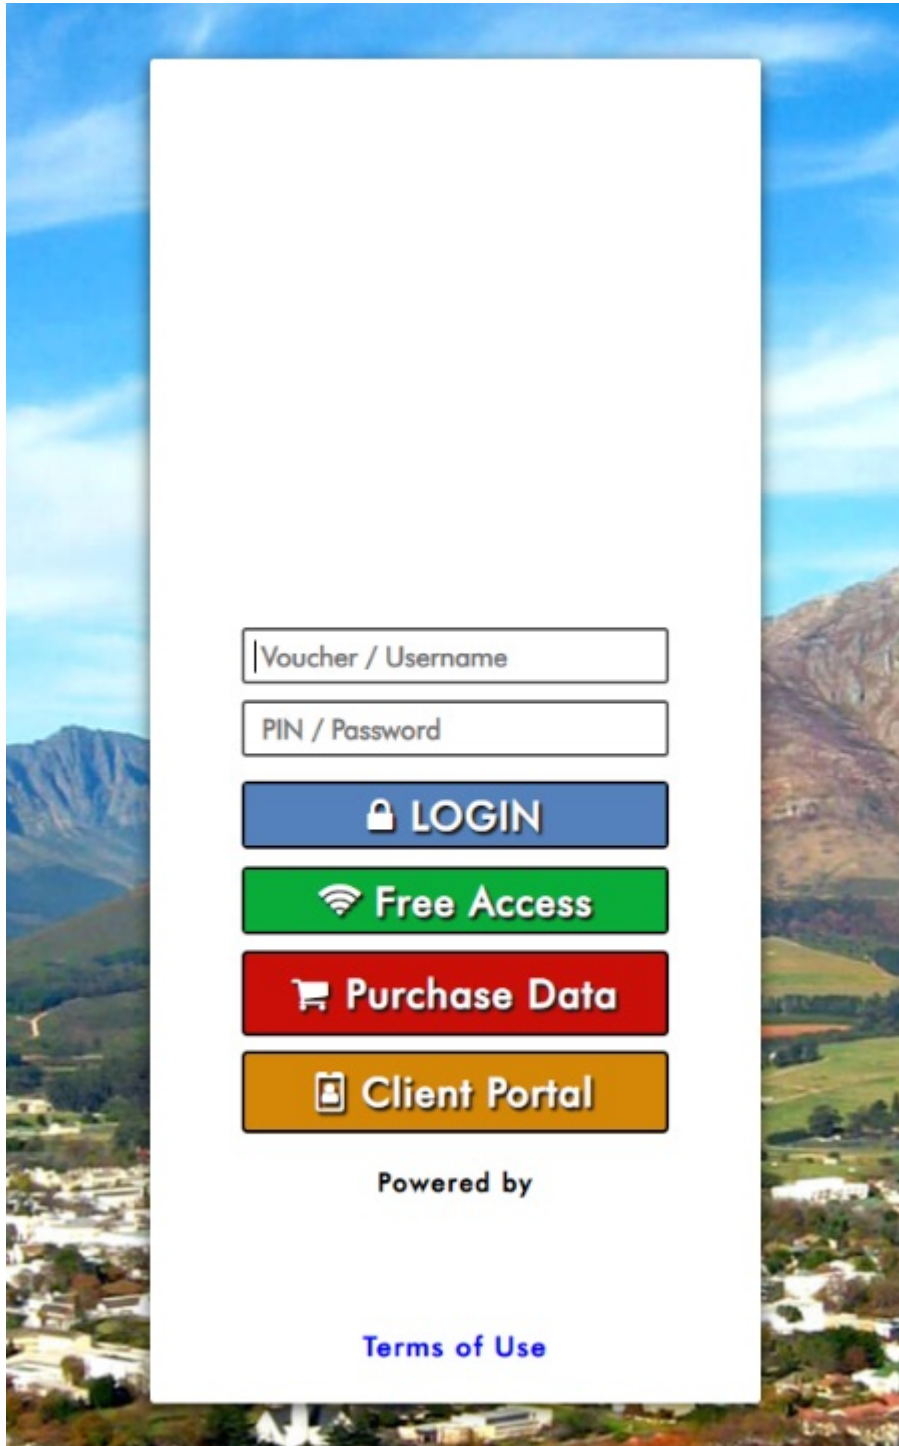

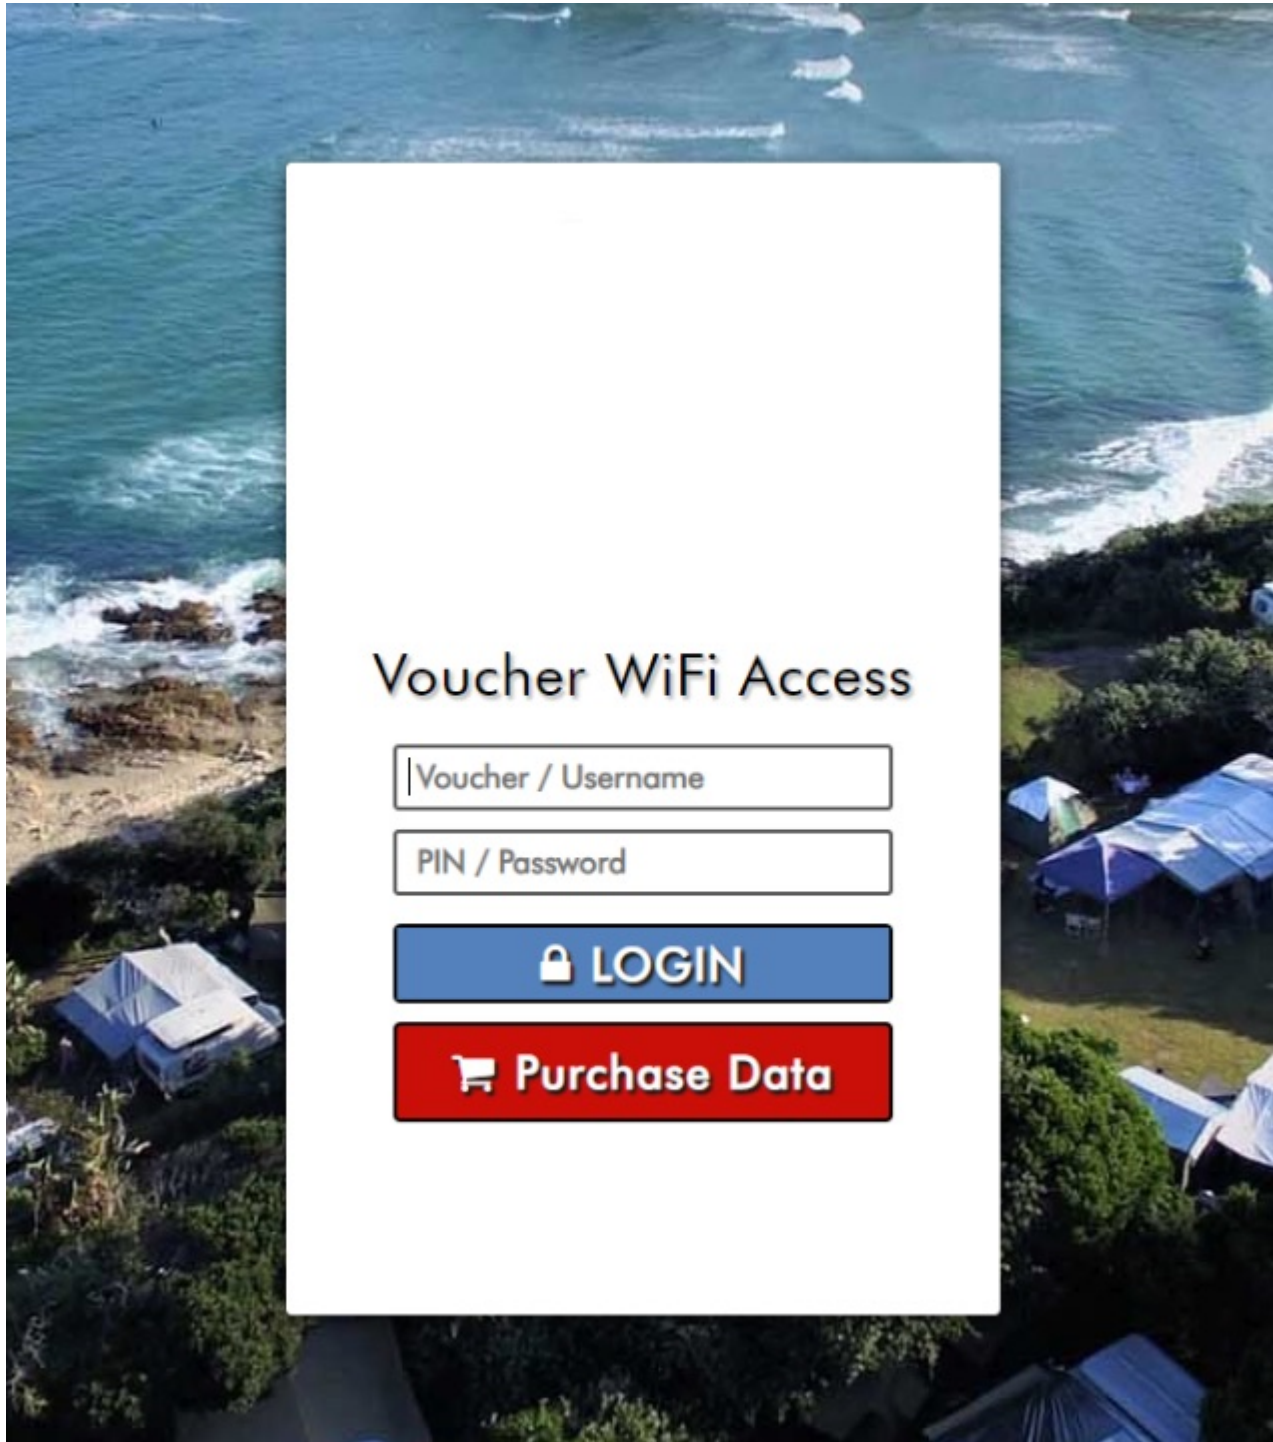

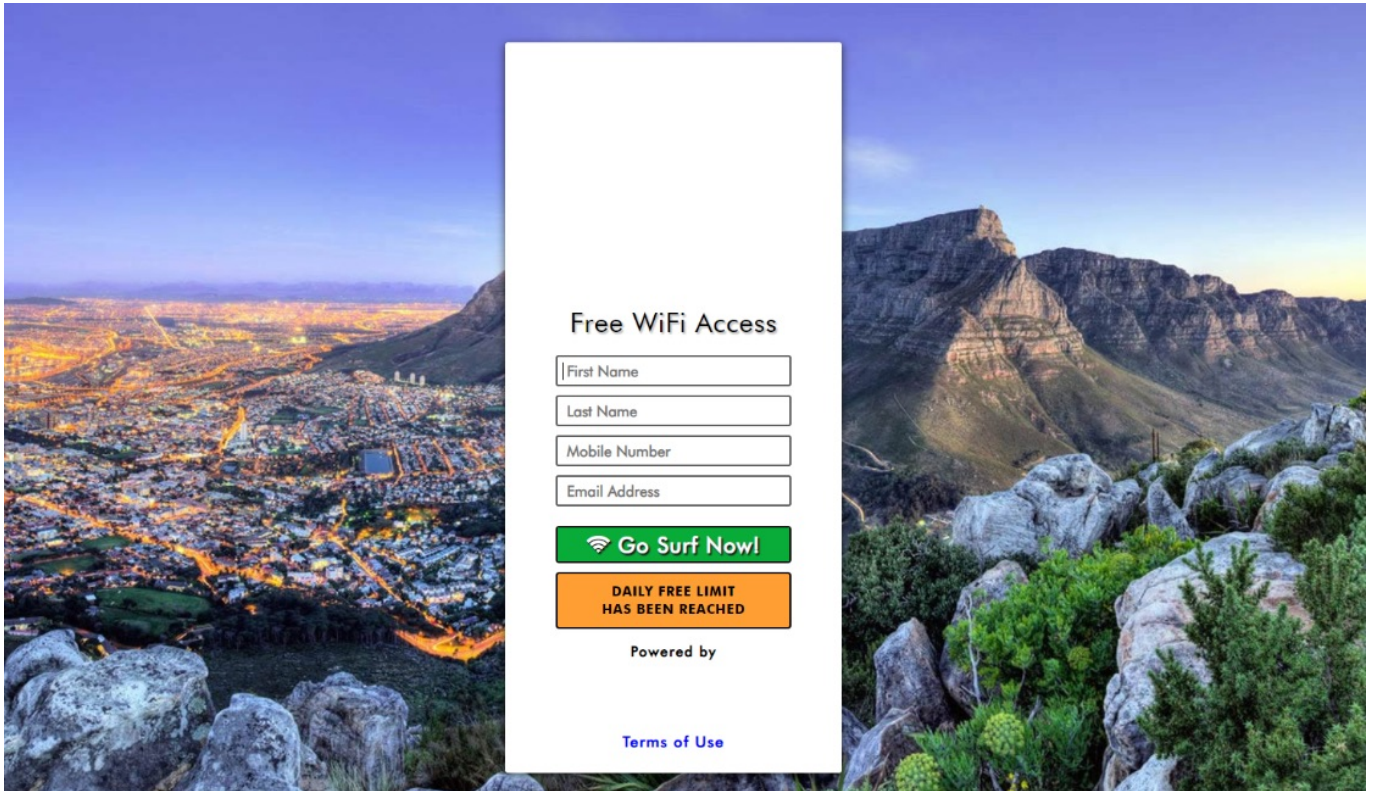





## 2. Template Usage

When using custom templates in HeroTill the various data variables are represented by tokens in the format `{{field_name}}`.

For example, the `{{company_name}}` variable will be replaced at display time by the actual company name as defined inside HeroTill.

When the various hotspot pages are loaded from the server to be displayed on the hotspot user's device the pages are read from disk, the variables replaced with their actual values



and the page content is then passed on for display on the end user device.

## 2.1. Embedded Variables

The variable names must be embedded inside the HTML & javascript code of the template itself. This is then replaced at runtime when the template files are loaded for display.

To display the image visible on mobile devices, use the following HTML:

```

```

Some variables are of type CSS. This is used to show or hide certain blocks on the various pages. To use these CSS variables insert them inside a style tag as follows:

```
<div style="{{free_trial_enabled}}">
  {{free_trial_details}}
<br>
  <a href='{{trial_login_link}}' class='btn'>
    {{free_trial_button_text}}
  </a>
</div>
```

This example will hide the entire free trial block if the switch is disabled. The free trial button text and URL link is also supplied via variables.

## 2.1.1. General Variables:

(available on all pages)

Variable	Type	Description	Source
{{page_title}}	Text	HTML page title	Automatic
{{hotspot_location_name}}	Text	Hotspot location name	Hotspot edit screen
{{company_name}}	Text	HeroTill company name	Company Setup
{{banner_logo_desktop}}	Url	Desktop banner image url	Hotspot edit screen
{{banner_logo_mobile}}	Url	Mobile phone banner image url	Hotspot edit screen

### Login header

Variable	Type	Description	Source
{{support_message}}	Text	Custom support text to show	Hotspot edit screen
{{twitter_account}}	Text	Twitter account name	Hotspot edit screen
{{terms_accepted}}	Css	Returns CSS to hide div if already accepted	Automatic
{{terms_link}}	Url	Link to the Terms & Cond page	Hotspot edit screen

### Login form

Variable	Type	Description	Source
{{login_text}}	Text	Text to show above login fields	Hotspot edit screen
{{show_error}}	Css	Returns CSS to hide div if no error	Automatic
{{error}}	Text	Login specific error text	Hotspot edit screen

## Free Trial

Variable	Type	Description	Source
{{free_trial_enabled}}	Css	Returns css to hide div if disabled	Hotspot edit screen
{{free_trial_details}}	Text	Free trial description text	Hotspot edit screen
{{free_trial_button_text}}	Text	Button Text for Free Trial login button	Hotspot edit screen
{{trial_link}}	Url	Link to login page	Automatic
{{trial_login_link}}	Url	Link to perform free trial login	Automatic

## Prepaid

Variable	Type	Description	Source
{{prepaid_enabled}}	Css	Returns CSS to hide div if disabled	Hotspot edit screen
{{prepaid_intro_text}}	Text	Custom prepaid intro text to show	Hotspot edit screen
{{twitter_account}}	Text	Twitter account name	Hotspot edit screen


## Vouchers

Variable	Type	Description	Source
{{display_voucher_error}}	Css	Returns CSS to hide div if no error	Automatic
{{voucher_error}}	Text	Voucher login error to show below login fields	Automatic
{{show_voucher_purchased}}	Css	Returns CSS to hide div if disabled	Automatic
{{voucher_number}}	Text	Newly purchased voucher number	Automatic
{{voucher_pin}}	Text	Newly purchased voucher pin	Automatic

## Products

Variable	Type	Description	Source
{{products_array}}		Start of product list	
{{product_id}}	Num	Unique ID for the product	Hotspot Products
{{product_title}}	Text	Product title	Hotspot Products
{{product_cost}}	Amount	Product cost	Hotspot Products
{{currency}}	Text	Currency symbol	System Settings
{{product_expire_months_show}}	Css	Returns CSS to hide div if disabled	Hotspot Products
{{product_expire_months}}	Text	Number of months before product exp	Hotspot Products
{{purchase_link}}	Url	Link to purchase this product	Hotspot Products
{{/products_array}}	Text	End of product list	

## 2.2. Login Page Sample

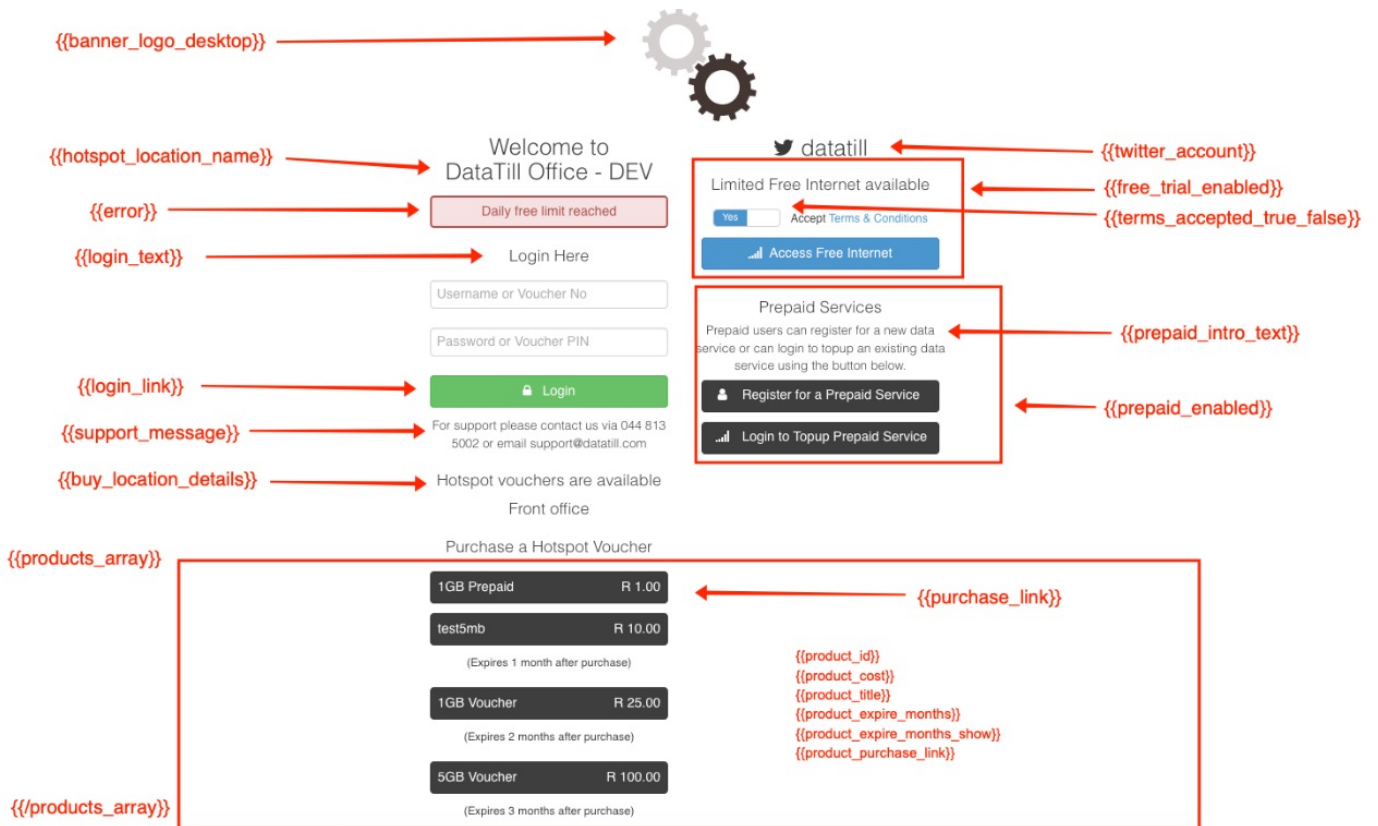

### 3. Purchase Page

Same general variables are available as on the login page.

#### Products

Variable	Type	Description	Source
{{products_array}}		Start of product list	

<code>{{product_id}}</code>	Num	Unique ID for the product	Hotspot Products
<code>{{product_title}}</code>	Text	Product title	Hotspot Products
<code>{{product_cost}}</code>	Amount	Product cost	Hotspot Products
<code>{{currency}}</code>	Text	Currency symbol	System Settings
<code>{{product_expire_months_show}}</code>	Css	Returns CSS to hide div if disabled	Hotspot Products
<code>{{product_expire_months}}</code>	Text	Number of months before product exp	Hotspot Products
<code>{{purchase_link}}</code>	Url	Link to purchase this product	Hotspot Products
<code>{/products_array}}</code>	Text	End of product list	

### Example:

The `{{products_array}}` can contain many products, and the code example below can be used to display these multiple products, together with the product info like price, purchase link, etc.

```

<div id='container' class='container row-fluid'>
  <div class='hidden-xs col-sm-1 col-md-2 col-lg-2'></div>
  <div id='login_container' >
    <table align='center' id='page_logo'>
      <tr>
        <td align='center' >
          <img class='hidden-xs logo_desktop col-xs-12 col-sm-12 col-md-12 col-lg-12' src='{{banner_logo_desktop}}'>
          <img class='hidden-sm hidden-md hidden-lg hidden-xl logo_mobile col-xs-12 col-sm-12 col-md-12 col-lg-12' src='{{banner_logo_mobile}}'>
        </td>
      </tr>
    </table>
    <div id='purchase_buttons' class="" style='text-align:center;'>
      <h4>Hotspot vouchers are available {{buy_location_details}}</h4>
      <div style=" border: 0px solid #023220;text-align:center;">
        <h4>Purchase a Hotspot Voucher</h4>
        {{products_array}}
        <a class='btn btn-inverse field_input hotspot_button' href='{{product_purchase_link}}' >
          <span class='pull-right'>{{currency}} {{product_cost}}</span>
          <span class='pull-left'>{{product_title}}</span>
        </a>
        <br>
        <small span='{{product_expire_months_show}}'>(Expires {{product_expire_months}} after purchase)<br><br></small>
        {{/products_array}}
      </div>
      <div id='purchase_back_button' class="" style='text-align:center;'>
        <a id='btn_cancel' href='javascript:history.back();' class='btn btn-primary field_input hotspot_button'><i class='fa fa-chevron-left ' ></i> &nbsp;   Cancel </a>
      </div>
    </div>
  </div>
</div>
    
```

Loop for every product passed into the list

## 4. Status Page

Same general variables are available as on the login page.

### Active Session Status

Variable	Type	Description	Source
{{usage_color}}	Text	Red, orange or green, depending on usage level	Automatic
{{usage_class}}	Text	Css label danger, warning or success	Automatic
{{status_url}}	Url	Link to reload the status page	Automatic
{{username}}	Text	Logged in /username	Automatic
{{ip}}	Text	IP Address	Automatic
{{mac}}	Text	MAC Address	Automatic
{{login_by_mac}}	Css	Returns css to hide not login by mac	Automatic
{{trial}}	Css	Returns css to hide not login by trial	Automatic
{{show_if_customer}}	Css	Returns css to hide if not customer acc	Automatic

<code>{{show_if_prepaid}}</code>	Css	Returns css to hide if not prepaid acc	Automatic
<code>{{customer_title}}</code>	Text	Customer title	Automatic

## Active Session Usage

Variable	Type	Description	Source
<code>{{usage_limit}}</code>	Text	Data limit text	Automatic
<code>{{usage_to_date}}</code>	Text	Data used	Automatic
<code>{{show_if_usage_percent}}</code>	Css	Returns css to hide if uncapped data	Automatic
<code>{{usage_percent}}</code>	Url	Usage percentage	Automatic
<code>{{show_if_package_explained}}</code>	Css	Returns css to hide no package details	Automatic
<code>{{package_explained}}</code>	Text	Package details and limits	Automatic
<code>{{capped_package}}</code>	Css	Returns css to hide if uncapped	Automatic
<code>{{show_if_usage}}</code>	Css	Returns css to hide if no usage exists	Automatic
<code>{{show_if_prepaid_usage_detail}}</code>	Css	Returns css to hide if no prepaid usage	Automatic
<code>{{if_topups}}</code>	Css	Returns css to hide if no topups	Automatic
<code>{{if_no_topups}}</code>	Css	Returns css to hide if topups exist	Automatic
<code>{{usage_detail}}</code>	Text	Total data & time usage for the current product	Automatic
<code>{{topup_to_date}}</code>	Text	Topups applied for the current period	Automatic
<code>{{total_limit}}</code>	Text	Total data & time limit	Automatic
<code>{{if_this_session_time_left}}</code>	Css	Returns css to hide if no time limit defined	Automatic
<code>{{this_session_time_left}}</code>	Text	Remain time for the current session	Automatic
<code>{{this_session_time_used}}</code>	Text	Total time used for the current session	Automatic
<code>{{show_if_not_trial_not_voucher}}</code>	Css	Returns css to hide if trial or voucher	Automatic
<code>{{show_if_voucher}}</code>	Css	Returns css to hide if not a voucher	Automatic
<code>{{voucher_explained}}</code>	Text	Voucher data & time limits	Automatic
<code>{{show_if_voucher_data_limit}}</code>	Css	Returns css to hide if not voucher with data limit	Automatic
<code>{{voucher_data_usage}}</code>		Current voucher data used	Automatic



<code>{{show_if_voucher_time_limit}}</code>	Css	Returns css to hide if not voucher with data limit	Automatic
<code>{{voucher_time_usage}}</code>		Current voucher time used	Automatic
<code>{{if_trial_with_data_limit}}</code>	Css	Returns css to hide if not free trial with data limit	Automatic
<code>{{free_trial_data_remaining}}</code>		Current free trial session data used	Automatic
<code>{{free_trial_data_limit}}</code>		Current free trial session time used	Automatic
<code>{{if_trial_with_time_limit}}</code>	Css	Returns css to hide if not free trial with time limit	Automatic
<code>{{free_trial_time_remaining}}</code>		Current free trial session remaining time	Automatic
<code>{{free_trial_time_limit}}</code>		Current free trial session total time limit	Automatic

## 5. Logout Page

Same general variables are available as on the login page.

### Last Session Details

Variable	Type	Description	Source
<code>{{usage_color}}</code>	Text	Red, orange or green, depending on usage level	Automatic
<code>{{usage_class}}</code>	Text	Css label danger, warning or success	Automatic
<code>{{status_url}}</code>	Url	Link to reload the status page	Automatic
<code>{{username}}</code>	Text	Logged in /username	Automatic
<code>{{ip}}</code>	Text	IP Address	Automatic
<code>{{mac}}</code>	Text	MAC Address	Automatic
<code>{{login_by_mac}}</code>	Css	Returns css to hide not login by mac	Automatic

<code>{{trial}}</code>	Css	Returns css to hide not login by trial	Automatic
<code>{{show_if_customer}}</code>	Css	Returns css to hide if not customer acc	Automatic
<code>{{show_if_prepaid}}</code>	Css	Returns css to hide if not prepaid acc	Automatic
<code>{{customer_title}}</code>	Text	Customer title	Automatic
<code>{{link_login}}</code>	Url	Link to get back to login page	Automatic

## Usage Details

Variable	Type	Description	Source
<code>{{usage_limit}}</code>	Text	Data limit text	Automatic
<code>{{usage_to_date}}</code>	Text	Data used	Automatic
<code>{{show_if_usage_percent}}</code>	Css	Returns css to hide if uncapped data	Automatic
<code>{{usage_percent}}</code>	Url	Usage percentage	Automatic
<code>{{show_if_package_explained}}</code>	Css	Returns css to hide no package details	Automatic
<code>{{package_explained}}</code>	Text	Package details and limits	Automatic
<code>{{capped_package}}</code>	Css	Returns css to hide if uncapped	Automatic
<code>{{show_if_usage}}</code>	Css	Returns css to hide if no usage exists	Automatic
<code>{{show_if_prepaid_usage_detail}}</code>	Css	Returns css to hide if no prepaid usage	Automatic
<code>{{if_topups}}</code>	Css	Returns css to hide if no topups	Automatic
<code>{{if_no_topups}}</code>	Css	Returns css to hide if topups exist	Automatic
<code>{{usage_detail}}</code>	Text	Total data & time usage for the current product	Automatic
<code>{{topup_to_date}}</code>	Text	Topups applied for the current period	Automatic
<code>{{total_limit}}</code>	Text	Total data & time limit	Automatic
<code>{{if_this_session_time_left}}</code>	Css	Returns css to hide if no time limit defined	Automatic
<code>{{this_session_time_left}}</code>	Text	Remain time for the current session	Automatic
<code>{{this_session_time_used}}</code>	Text	Total time used for the current session	Automatic
<code>{{show_if_not_trial_not_voucher}}</code>	Css	Returns css to hide if trial or voucher	Automatic
<code>{{show_if_voucher}}</code>	Css	Returns css to hide if not a voucher	Automatic
<code>{{voucher_explained}}</code>	Text	Voucher data & time limits	Automatic
<code>{{show_if_voucher_data_limit}}</code>	Css	Returns css to hide if not voucher with data limit	Automatic

<code>{{voucher_data_usage}}</code>		Current voucher data used	Automatic
<code>{{show_if_voucher_time_limit}}</code>	Css	Returns css to hide if not voucher with data limit	Automatic
<code>{{voucher_time_usage}}</code>		Current voucher time used	Automatic
<code>{{if_trial_with_data_limit}}</code>	Css	Returns css to hide if not free trial with data limit	Automatic
<code>{{free_trial_data_remaining}}</code>		Current free trial session data used	Automatic
<code>{{free_trial_data_limit}}</code>		Current free trial session time used	Automatic
<code>{{if_trial_with_time_limit}}</code>	Css	Returns css to hide if not free trial with time limit	Automatic
<code>{{free_trial_time_remaining}}</code>		Current free trial session remaining time	Automatic
<code>{{free_trial_time_limit}}</code>		Current free trial session total time limit	Automatic

## 6. Code Examples

### 6.1. Login

```
<style>

    @media (min-width: 992px){
        .welcome{
            text-align: center;
        }
    }
    @media (min-width: 1200px){
        .welcome{
            text-align: center;
        }
    }
    @media screen and (min-width: 320px) and (max-width:480px) and (orientation :
portrait) {
        h1 {
            font-size: 1.17em;
        }

        .welcome{
            text-align: center;
        }
        #purchase_buttons{
            margin-left: 15px;
        }
    }
    @media screen and (min-width: 320px) and (max-width:480px) and (orientation :
landscape) {
        h1 {
            font-size: 1.17em;
        }

        .welcome{
            text-align: center;
        }
        #purchase_buttons{
            margin-left: 15px !important;
        }
        .title{
            margin-left: 15px !important;
        }
    }
    @media screen and (min-width: 360px) and (max-width:640px) and (orientation :
portrait) {
        h1 {
            font-size: 1.17em;
        }
    }

```

```
.welcome{
    text-align: center;
}
#purchase_buttons{
    margin-left: 15px;
}
}
@media screen and (min-width: 360px) and (max-width:640px) and (orientation :
landscape) {
    h1 {
        font-size: 1.17em;
    }

    .welcome{
        text-align: center;
    }
    #purchase_buttons{
        margin-left: 15px !important;
    }
    .title{
        margin-left: 15px !important;
    }
}
}
@media screen and (min-width: 375px) and (max-width:667px) and (orientation :
landscape) {
    h1 {
        font-size: 1.17em;
    }

    .welcome{
        text-align: center;
    }
    #purchase_buttons{
        margin-left: 15px !important;
    }
    .title{
        margin-left: 15px !important;
    }
}
}

</style>
<!-- LOGIN -->

<!-- FOR CENTERING -->

<table width="100%" style="">
    <tr>
        <td align="center" valign="middle">
            <div id = "logo_panel" style="">

                <h1 class = "welcome" style="color:#009EE2;text-align:
center;"><strong>Welcome</strong> to {{hotspot_location_name}}</h1>
            </div>
        </td>
    </tr>
</table>
```

```

        </div>
    </td>
</table>

<table width="100%" style="background-color:#A3A3A3;">
    <td align="center" valign="middle">
        <!-- FOR CENTERING -->

        <!-- OPEN PAGE -->
        <div id='container' class="container row-fluid">

            <div id='login_container'>

                <!-- MAIN PAGE BOX -->
                <div id="login-box" style="margin-top: 20px;">
                    <div id='purchase_buttons' class="tile title"
style='text-align:left;'>

                        <div style=" border: 0px solid
#D2322D;text-align:left;">

                            <p style="color:#EDEDDE;">
                                Hotspot vouchers are available

                                <br>
                                Purchase a Hotspot Voucher
                            </p>

                            <div class="alert alert-danger"
style="{{display_voucher_error}} margin-top: 0px; margin-bottom: 5px; padding: 5px;
border: 2px solid #AF4341; text-align:center;">
                                {{voucher_error}}
                            </div>

                            {{products_array}}
                            <a class='btn btn-default field_input
hotspot_button' href='{{product_purchase_link}}'>
                                <span class='pull-right'>
{{currency}} {{product_cost}}</span>
                                <span class='pull-left'><i
class="fa fa-wifi" style="color:#A3A3A3"></i> &nbsp;{{product_title}}</span>
                            </a>
                            <br>
                            {{/products_array}}

                        </div>
                    </div>
                    <!-- FORM BOX -->

                    <div
style="{{show_trial_limit_not_reached}};{{show_trial_not_register}};margin: 0 0 -10px 0"
align="center">

                        <div class="tile ">

                            <div class="alert alert-success"
style=" {{show_voucher_purchased}} margin-top: 10px; margin-bottom: 0px; padding: 5px;
border: 2px solid #459605; text-align:center;">

                                <h4 style="margin-bottom: 0px;

```

```

border-bottom-width: 0px;">
purchased a hotspot voucher.
                                You have successfully
                                <br>
                                Voucher:
<b>{{voucher_number}}</b>, PIN: <b>{{voucher_pin}}</b>
                                </h4>
                                </div>
                                <div id="free_trial" class="tile"
style="{{free_trial_enabled}}">
                                <form name='trial'
action='{{login_link}}' method='post' style="margin-left:10px; margin-bottom: 5px; border:
0px solid #3276B1; text-align:center;">
                                <div class="box-content"
style="padding-bottom: 10px;">
                                <p
style="color:#EDED; text-align:left; ">
                                Limited
                                <br>
                                Free Internet available
                                <br>
                                {{free_trial_details}} Free Daily
                                </p>
                                <div
id='accept_terms_block' class="col-xs-12 col-sm-12 col-md-12 col-lg-12"
style="margin-bottom: 10px;margin-top: 10px; margin-top:0px; height:20px;
{{terms_accepted}}">
                                <noabr>
                                <input class='make-switch' type="checkbox" id="accept_terms" checked >
                                <small style='font-size: 12px; font-weight: 400;'>
                                &nbsp; Accept <a href="{{terms_link}}">Terms & Conditions</a>
                                </small>
                                </noabr>
                                </div>
                                <!-- Enable the
-->
                                <!--
                                <span class="btn btn-primary
field_input hotspot_button" onclick='do_login()' style="width: 257px"
data-loading-text="Logging In..."><i class='fa fa-signal '></i>
&nbsp;<?=$hotspot['free_trial_button_text']?></span> -->
                                <!-- Disable the
line below when enabling the line above -->
                                <a class="btn
btn-primary field_input hotspot_button" href="{{trial_login_link}}"
style="background-color: #009FE3; border: 1px solid #D1D1D1; margin-left: -2px; float:
left;" data-loading-text="Logging In..."><i class='fa fa-signal '></i>
&nbsp;{{free_trial_button_text}}</a>
                                </div>
                                </form>
                                </div>

```

```

                                <form id='NormalLogin'
class="form-horizontal" action='{{login_link}}' method='post' style="margin-bottom: 5px;
border: 0px solid #459605; text-align:center;">
                                <div class="box-content"
style="padding-bottom: 10px;">
                                <p style="color:#EDED;
text-align: left; margin-left: 15px;">
                                {{login_text}}
                                </p>
                                <div
class="control-group" style="margin-bottom: 10px;">
                                <div
class="controls controls-row" style="margin-left: 0px; ">
                                <input
type='text' class='field_input' style="background-color: #21BBEF; color:white;"
id='username' placeholder='Username or Voucher No' name='username'
value="{{voucher_number}}" {{enable_disable_autocomplete}} >
                                </div>
                                </div>
                                <div
class="control-group" style="margin-bottom: 10px;" >
                                <div
class="controls controls-row" style="margin-left: 0px; ">
                                <input
type="password" class="field_input" style="background-color: #21BBEF; color:white;"
id="password" name="password" placeholder="Password or Voucher PIN" value="{{voucher_pin}}"
{{enable_disable_autocomplete}} >
                                </div>
                                </div>
                                <div class="alert
alert-danger" style="{{show_error}} margin-top: 0px; margin-bottom: 5px; padding: 5px;
border: 2px solid #AF4341; text-align:center;">
                                {{error}}
                                </div>
                                <button type='submit'
style="background-color: #009FE3; border: 1px solid #D1D1D1;" class="btn btn-success
field_input hotspot_button" ><i class='fa fa-sign-in '></i> &nbsp; Login</button>
                                </div>
                                </form>

                                <div id="trial_limit_reached"
class="tile" style="{{show_trial_limit_reached}}">
                                <div class="alert alert-danger"
style=" margin-top: 0px; margin-bottom: 5px; padding: 5px; border: 2px solid #AF4341;
text-align:center; float: left;
margin-left: 8px;">
                                Daily free limit of
                                {{free_trial_details}} reached
                                </div>

```



```

        </div>

        <div id='prepaid_buttons' class="tile"
style="({prepaid_enabled})" >
            <div id='prepaid_buttons'
class="box-content" style="margin-bottom: 5px; border: 0px solid #3276B1;
text-align:center;">
                <div style=" border: 0px
solid #D2322D;text-align:left;">
                    <div
style="margin-left: 9px;">
                        <p
style="color:#EDED;">
                            Prepaid Services
                        </p>
                        <span
style='color:#EDED;font-weight:300;font-size: 13px;'>{{prepaid_intro_text}}</span>
                    </div>
                    <div
style="margin-top: 5px; margin-bottom: 10px; text-align:left; margin-left: 7px;">
                        <a
href='/register' class="btn btn-default field_input hotspot_button hotspot_button"><i
class='fa fa-fw fa-user ' style="color:#A3A3A3; float: left; " ></i> &nbsp;&nbsp;&nbsp; Register for a
Prepaid Service &nbsp;&nbsp;&nbsp;</a>
                    </div>
                    <div
style="margin-top: 10px; margin-bottom: 5px; text-align:left; margin-left: 7px;">
                        <a
href='/login' class="btn btn-default field_input hotspot_button hotspot_button"><i
class='fa fa-fw fa-signal ' style="color:#A3A3A3; float: left;" ></i> &nbsp;&nbsp;&nbsp; Login to
Topup Prepaid Service</a>
                    </div>
                </div>
            </div>
        </div>
    </div>
    <!-- FORM BOX -->
</div>
<!-- CLOSE PAGE -->
</div>
<!-- CLOSE PAGE -->
<!-- FOR CENTERING -->
</td>
</table>
<div style = "width: 100%; display: block; text-align: center;" >
    <span style="color:#009EE2;margin-top:5px;">
        <strong>{{partner_text}}</strong>
    </span>
    <br>

```

```
  
<br>  
</div>
```

## 6.2. Logout Page

```

<div id='container' class="container row-fluid">
  <div class="hidden-xs col-sm-1 col-md-2 col-lg-2"></div>
  <div id='login_container' >

    <table align="center" id='page_logo' >
      <tr>
        <td align="center" >
          
          
        </td>
      </tr>
    </table>

    <table align="center" class='table'>

      <tr>
        <td colspan="2" align="center">
          <div style="text-align: center;" class="st"><h3>You have been logged out</h3></div>
        </td>
      </tr>

      <tr style='{{show_if_twitter_account}}'>
        <td colspan="2" align="center">
          <div style="margin-top: 15px; margin-bottom: 15px;">
            <h3 style="margin-top: 10px; margin-bottom: 0px; text-align:center;"><i class="fa
fa-twitter"></i> <a href='http://twitter.com/{{twitter_account}}'
target='_blank'>{{twitter_account}}</a></h3>
          </div>
        </td>
      </tr>

      <tr style='{{show_if_portal_link}}'>
        <td colspan="2" align="center">
          <div style="margin-top: 15px; margin-bottom: 15px;">
            <a class="btn btn-warning field_input hotspot_button" href='{{portal_link}}'><i
class='fa fa-university '></i> &nbsp;{{portal_link_button_text}}</a>
          </div>
        </td>
      </tr>

      <tr style='{{show_if_customer}}'>
        <td class="status_heading">Customer</td><td><b> {{customer_title}}</b></td>
      </tr>

      <tr style='{{show_if_voucher}}'>
        <td class="status_heading">Voucher Details</td><td>
          {{voucher_explained}}
        </td>
      </tr>

      <tr style='{{show_if_voucher_data_limit}}'>
        <td class="status_heading">Data Usage</td><td>{{voucher_data_usage}}</td>
    
```



```
    {{free_trial_time_remaining}} of {{free_trial_time_limit}}
  </td>
</tr>

<tr>
  <td colspan="2" style="padding-top: 0px; padding-bottom: 0px;">
    <hr style="margin-top: 0px; margin-bottom: 0px;">
  </td>
</tr>

<tr>
  <td class="status_heading">This Session</td><td>
    {{this_session_data_used}}
  </td>
</tr>
<tr>
  <td align="right" class="h">Duration</td><td>
    {{this_session_time_used}}
  </td>
</tr>

<tr>
  <td colspan="2" class="padding-top: 0px; padding-bottom: 0px;">
    <hr style="margin-top: 0px; margin-bottom: 0px;">
  </td>
</tr>

<tr style="{{show_if_not_trial_not_voucher}}">
  <td class="status_heading">Username</td><td>
    {{username}}
  </td>
</tr>

<tr style="{{show_if_voucher}}">
  <td class="status_heading">Voucher No</td><td>
    {{username}}
  </td>
</tr>

<tr style="{{if_show_save_login}}"><td colspan=2 align=center>
  <a href="{{save_login_link}}" class='btn btn-success hotspot_button'>
    Save login for this device?
  </a>
</td></tr>

<tr><td colspan=2 align='center'>
  <small style='color:#999'>
    <nobr>IP Address: {{ip}},</nobr> <nobr>MAC Address: {{mac}}</nobr>
  </small>
</td></tr>

<tr><td colspan=2>
```

```
    <a href="{{link_login}}" class='btn btn-danger hotspot_button'  
    style='margin-left:20px;'><i class='fa fa-lock '></i> &nbsp;Log In</a>  
  </td></tr>  
  
</table>  
  
</div>  
</div>
```

## 6.3. Purchase

```

<div id='container' class="container row-fluid">
    <div class="hidden-xs col-sm-1 col-md-2 col-lg-2"></div>
    <div id='login_container' >

        <table align="center" id='page_logo'>
            <tr>
                <td align="center" >
                    
                    
                </td>
            </tr>
        </table>
        <div id='purchase_buttons' class=" "
style='text-align:center;'>
            <h4>Hotspot vouchers are available
{{(buy_location_details)}}</h4>
            <div style=" border: 0px solid
#D2322D;text-align:center;">
                <h4>Purchase a Hotspot Voucher</h4>
                {{(products_array)}}
                <a class='btn btn-inverse field_input
hotspot_button' href='{{(product_purchase_link)}}' >
                    <span
class='pull-right'>{{(currency)}} {{(product_cost)}}</span>
                    <span
class='pull-left'>{{(product_title)}}</span>
                </a>
                <br>
                <small
span='{{(product_expire_months_show}})'>(Expires {{(product_expire_months)}} after
purchase) <br><br></small>
                {{(/products_array)}}
            </div>
            <div id='purchase_back_button' class=" "
style='text-align:center;'>
                <a id="btn_cancel"
href='javascript:history.back();' class='btn btn-primary field_input hotspot_button'><i
class='fa fa-chevron-left '></i> &nbsp; Cancel </a>
            </div>
        </div>
    </div>

```

## 6.4. Status



```

<div id='container' class="container row-fluid">
  <div class="hidden-xs col-sm-1 col-md-2 col-lg-2"></div>
  <div id='login_container' >

    <table align="center" id='page_logo' >
      <tr>
        <td align="center" >
          
          
        </td>
      </tr>
    </table>

    <table align="center" class='table'>

      <tr style='{{show_if_twitter_account}}'>
        <td colspan="2" align="center">
          <div style="margin-top: 15px; margin-bottom: 15px;">
            <h3 style="margin-top: 10px; margin-bottom: 0px; text-align:center;"><i class="fa
fa-twitter"></i> <a href='http://twitter.com/{{twitter_account}}'
target='_blank'>{{twitter_account}}</a></h3>
          </div>
        </td>
      </tr>

      <tr style='{{show_if_portal_link}}'>
        <td colspan="2" align="center">
          <div style="margin-top: 15px; margin-bottom: 15px;">
            <a class="btn btn-warning field_input hotspot_button" href='{{portal_link}}'><i
class='fa fa-university '></i> &nbsp;{{portal_link_button_text}}</a>
          </div>
        </td>
      </tr>

      <tr style='{{show_if_customer}}'>
        <td class="status_heading">Customer</td><td><b> {{customer_title}}</b></td>
      </tr>

      <tr style='{{show_if_voucher}}'>
        <td class="status_heading">Voucher Details</td><td>
          {{voucher_explained}}
        </td>
      </tr>
      <tr style='{{show_if_voucher_data_limit}}'>
        <td class="status_heading">Data Usage</td><td>{{voucher_data_usage}}</td>
      </tr>
      <tr style='{{show_if_voucher_time_limit}}'>
        <td class="status_heading">Time Usage</td><td>{{voucher_time_usage}}</td>
      </tr>
    
```



```

<tr>
  <td colspan="2" style="padding-top: 0px; padding-bottom: 0px;">
    <hr style="margin-top: 0px; margin-bottom: 0px;">
  </td>
</tr>

<tr>
  <td class="status_heading">This Session</td><td>
    {{this_session_data_used}}
  </td>
</tr>

<tr>
  <td align="right" class="h">Duration</td><td>
    {{this_session_time_used}}
  </td>
</tr>

<tr>
  <td colspan="2" class="padding-top: 0px; padding-bottom: 0px;">
    <hr style="margin-top: 0px; margin-bottom: 0px;">
  </td>
</tr>

<tr style='{{show_if_not_trial_not_voucher}}'>
  <td class="status_heading">Username</td><td>
    {{username}}
  </td>
</tr>

<tr style='{{show_if_voucher}}'>
  <td class="status_heading">Voucher No</td><td>
    {{username}}
  </td>
</tr>

<tr style='{{if_show_save_login}}'><td colspan=2 align=center>
  <a href="{{save_login_link}}" class='btn btn-success hotspot_button'>
    Save login for this device?
  </a>
</td></tr>

<tr><td colspan=2 align='center'>
  <small style='color:#999'>
    <noabr>IP Address: {{ip}},</noabr> <noabr>MAC Address: {{mac}}</noabr>
  </small>
</td></tr>

<tr><td>
  <a href="{{link_logout}}" class='btn btn-danger hotspot_button'
  style='margin-left:20px;'><i class='fa fa-lock '></i> &nbsp;Log Out</a>
</td><td>
  <a href="{{status_url}}" class='pull-right btn btn-primary hotspot_button'
  style='margin-right:20px;'><i class='fa fa-refresh '></i> &nbsp;Refresh Now</a>

```

```
</td></tr>  
  
</table>  
  
</div>  
</div>
```